

Advanced Heating & Hot Water Systems

www.htproducts.com

# EVERLASS RESIDENTIAL Stainless Steel Electric Water Heater

BUILT TO LAST LONGER

40 Gallons and 52 Gallons





THERMO USA

Industry Best Lifetime Warranty



# **Stainless Steel Electric Water Heater**

#### **THERMOSTAT AND HIGH LIMIT CONTROLS:** Residential Temp: Min 110° F Max 150° F

HOT WATER CONNECTION:

Outlet connection on the top of the tank (with built in Heat Traps)

### THE FINEST PROTECTION:

Laser welded through a concentrated heat source producing high quality, long lasting, 316L stainless steel tank construction (lightweight) - Superior corrosion resistance, eliminates the need for anode rods, protects against harsh water conditions for a lifetime of durability against leaks - Fantastic Limited Lifetime Warranty

### MINIMAL HEAT LOSS:

Heavy-duty insulation


#### **TITANIUM ELEMENTS:**

Low watt operation; Highest quality titanium elements; Increases corrosion resistance for extended, longer element life



# **EVERLAST ELECTRIC : 316L STAINLESS STEEL WATER HEATER**

The Everlast Electric Water Heater combines high quality stainless steel construction and energy efficient operation, providing long draws of hot water without consuming large amounts of energy. A cleverly designed water connection directs cold water to the heating element near the bottom of the tank to minimize the mixing of cold and hot water. Durable components, low standby heat losses, high recovery rates, and the industry's strongest warranty make the Everlast Electric Water Heater an ideal choice for electric water heating needs.

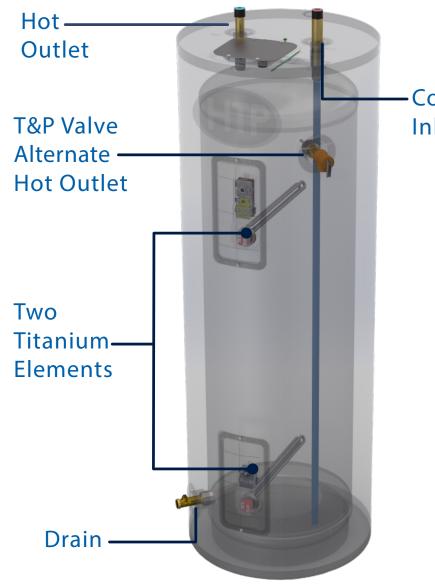

# A Closer Look

Cold Inlet

The Inlet & Outlet have Built in Heat Traps, Keeping the Heat in the Tank for Greater Efficiency

316L Stainless Steel - Laser Welded Tank



## Our Components are Made of Durable Materials:

Inlet and Outlet Nipples Constructed of Durable Brass

> Titanium Elements

Made with High Grade 316L Stainless Steel Materials

# The Advantages Stainless Steel VS Glass-Lined



HTP's Stainless Steel Tank Lightweight




Top Competitor's Glass-lined Tank Very Heavy

Minimizes Scale Build Up Prolongs Tank Life No Need for Anode Rods Lightweight Construction

### NO Anode Rods Needed!

All coated tanks require anodes to delay the inevitable corrosion and tank failure. The average residential water heater lasts about 13 years. The Everlast stainless steel tank will outlast any coated steel tank in the market.



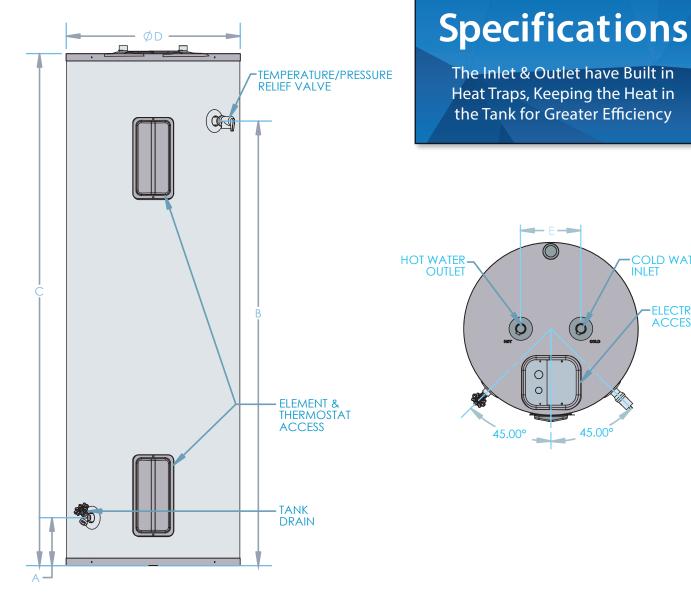

SPECIFICATIONS AND DIMENSIONS								WATER TEMPERATURE RATINGS		
Models	Nominal Gallon	DOE Rated Storage Vol. (Gal)	A	В	с	D	E	Minimum Delivered Temp.	Maximum Delivered Temp.	High Temp. Limit
EVR040C2X045N	40	20	5.75″	46″	54.25″	19.5″	8″			
EVR040C2X055N	40	39	5./5	40	54.25	19.5	ð	110°F	150°F	170°F
EVR052C2X045N	50	40				10 5	8″	43.3°C	65.5°C	76.6℃
EVR052C2X055N	52	48	5.75″	58.25″	66.75″	19.5″	ð			

COLD WATER

ELECTRICAL ACCESS PANEL

INLET

 $(\mathbf{O})$ 

45.00

Residential Models	Wattage	Voltage	Safety Listing	First Hour Bin		Recovery Efficiency	Recovery @ 90° F Rise	Shipping Weight	
Models					First Hour Rating	UEF	Linclency	JO T MISC	mengine
EVR040C2X045N	4500	240		Medium	56 Gallons	.94	98%	20 Gallons	104 lbs
EVR040C2X055N	5500	240			56 Gallons			25 Gallons	
EVR052C2X045N	4500	240	UL174	Medium	62 Gallons	.93	98%	20 Gallons	118 lbs
EVR052C2X055N	5500	240			62 Gallons			25 Gallons	

Energy Factor based on D.O.E. (Department of Energy) test procedures. Heaters furnished with standard 240 volt AC, single phase non-simultaneous wiring. www.htproducts.com • 272 Duchaine Blvd, New Bedford, MA • © Ariston Thermo USA LLC. 12/15/21 • MKTLIT-59 In accordance with our company policy of ongoing product improvement, HTP reserves the right to make changes without prior notice.